PRODUCT SHEET

Studded Rubber Matting

SPECIFICATIONS		
Polymer	NR / SBR	
Colour	Black	
Specific Gravity	1.5	ASTM D297
Hardness	65° ± 5° Shore A	ASTM D2240
Tensile Strength	3.5MPa (min)	ASTM D412
Elongation@break	250% (min)	ASTM D412
Temp Range	0°C to +65°C	

FEATURES

Studded Matting is made from a blended natural rubber compound and features an anti-slip 'snakeskin' studded profile on its top surface

The matting provides insulation against the cold on concrete floors along with better grip

It is easy to keep clean and is used for a variety of areas and applications for both commercial and residential use

Uses include ramps and walkways, entrance areas, storerooms, workshops, gym areas and garage floors

SIZES AVAILABLE	
3mm thickness	1000mm, 1200mm & 1500mm wide
4.5mm thickness	1200mm & 1500mm wide
Roll Length	10mt

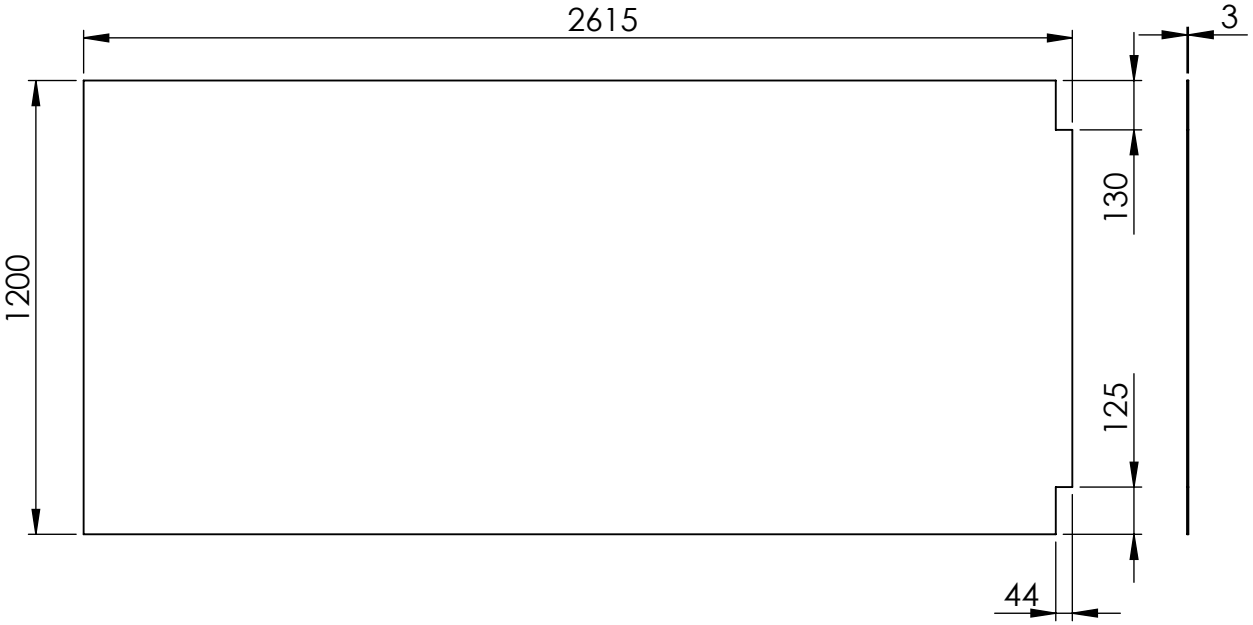

DIMENSIONS ARE ONLY APPROXAMATE
& REQUIRE CHECKING ON SITE

MATERIAL:- SBR

UNLESS OTHERWISE SPECIFIED: TOLERANCES: MACHINE + / - 0.25mm FABRICATION + / - 1.0 mm

DIMENSIONS IN MILLIMETRES

THIS DRAWING IS THE PROPERTY OF MECHANICAL ENGINEERING & CAD SERVICES (MECS) Pty Ltd & MUST NOT BE MANUFACTURED FROM,COPIED OR TRANSMITTED TO A THIRD PARTY WITHOUT THE PRIOR APPROVAL FROM MECHANICAL ENGINEERING & CAD SERVICES (MECS) Pty Ltd

MECS
Mechanical Engineering & CAD Services
11 Campbell Place WAGGA NSW 2650
Ph: - 0409 985 816
Email: nick@mecservices.com.au

THIRD ANGLE PROJECTION

WEIGHT: 9 kg

CLIENT

RODDY ENGINEERING
14 Waratah St TUMUT NSW 2720
Ph: - 02 6947 4039
Email: roddyeng.com.au

TITLE: 3 THK STUDDED RUBBER MATTING

DWG NO.	3947-80-10		A4
DRAWN N DE BRUYN	DATE 4/09/2025	SCALE:1:20	SHEET 1 OF 1